


Geka®plus

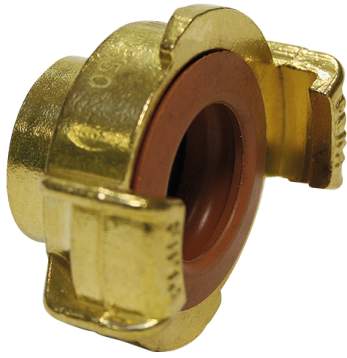

Certified potable water coupling with female thread

Norm	DVGW VP 550
Norm thread	DIN EN ISO 228-1
Thread description	BSPP thread / G-thread
Norm sealing	DVGW W 270, KTW-D2
Material	Brass according to DIN 50930/6
Working pressure	40 bar
Min. temperature	-5 °C
Max. temperature	+90 °C
Lug distance	40 mm
Material seal/gasket	NBR
Material threaded seal	EPDM
Colour sealing	Red-brown
Colour threaded seal	Black

Art.-no.	Female thread	Weight (kg/pce)
5356013000	1/2"	0,094
5356019000	3/4"	0,096
5356025000	1"	0,100

