


## Geka®plus

### Certified potable water coupling with hose tail

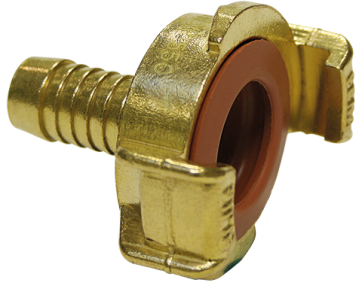

Norm	DVGW VP 550
Norm sealing	DVGW W 270, KTW-D2
Material	Brass according to DIN 50930/6
Working pressure	40 bar
Min. temperature	-5 °C
Max. temperature	+90 °C
Lug distance	40 mm
Material seal/gasket	NBR
Colour sealing	Red-brown

Art.-no.	For hose Ø inner (mm)	Weight (kg/pce)
5355013000	13	0,092
5355019000	19	0,102
5355025000	25	0,123

