


RADIACORD®/DIN

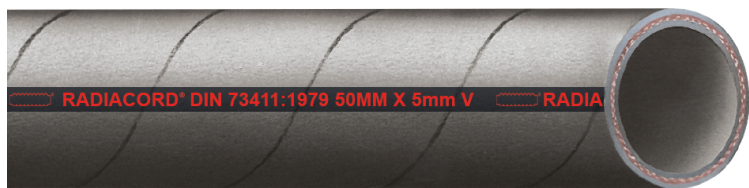

Standardized radiator and hot water hose

suitable for the most common cooling liquids. Also suitable for hot water and cooling water applications.

Marking: Radiacord® DIN 73411:1979 DN x wall thickness V - year / quarter

Norm	DIN 73411 from July 1979, EN ISO 1307:2008
Working pressure	4 bar
Bursting pressure	12 bar
Min. temperature	-30 °C
Max. temperature	+130 °C
Compound tube	EPDM

Construction tube	Smooth
Color tube	Black
Compound cover	EPDM
Cover	Fabric finish
Color cover	Black
Reinforcements	Textile plies

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Weight (kg/mtr)	Length (mtr)
3116010000	10,0	3,0	16,0	0,160	1
3116013000	13,0	3,5	20,0	0,230	1
3116015000	15,0	3,5	22,0	0,260	1
3116018000	18,0	3,5	25,0	0,300	1
3116020000	20,0	3,5	27,0	0,330	1
3116022000	22,0	3,5	29,0	0,360	1
3116025000	25,0	3,5	32,0	0,400	1
3116028000	28,0	4,0	36,0	0,500	1
3116030000	30,0	4,0	38,0	0,540	1
3116032000	32,0	4,0	40,0	0,580	1
3116035000	35,0	4,0	43,0	0,620	1
3116038000	38,0	5,0	48,0	0,800	1
3116040000	40,0	5,0	50,0	0,900	1
3116042000	42,0	5,0	52,0	0,940	1
3116045000	45,0	5,0	55,0	1,000	1
3116048000	48,0	5,0	58,0	1,060	1
3116050000	50,0	5,0	60,0	1,100	1
3116055000	55,0	5,0	65,0	1,200	1
3116060000	60,0	5,0	70,0	1,300	1
3116065000	65,0	5,0	75,0	1,400	1
3116070000	70,0	5,0	80,0	1,500	1
3116075000	75,0	5,0	85,0	1,600	1
3116080000	80,0	5,0	90,0	1,700	1
3116090000	90,0	6,0	102,0	2,300	1
3116100000	100,0	6,0	112,0	2,500	1
3116110000	110,0	6,0	122,0	2,800	1
3116120000	120,0	7,0	134,0	3,500	1

Remark:

- Cutted length not possible

We recommend assembly with

5327
Hose coupling



5340
Hose tail



6060
ABA clamps

