


SOLVOFORM

Compressor air hose

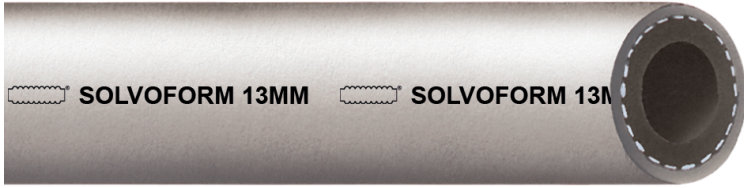

Marking:  Solvoform - dimension

Norm	EN ISO 1307:2008	Construction tube	Smooth
Working pressure at 20°C	20,0 bar	Color tube	Black
Bursting pressure	60 bar	Compound cover	Thermoplastic elastomer
Min. temperature	-20 °C	Cover	Smooth
Max. temperature	+60 °C	Color cover	Grey
Electr. resistance tube	Electrical conductive <math><10^6 \Omega</math>	Reinforcements	Polyester plies
Compound tube	TPE/TPU		

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3210006000	6,0	4,0	14,0	50	0,170	50
3210008000	8,0	3,5	15,0	65	0,175	50
3210010000	10,0	3,5	17,0	75	0,200	50
3210013000	13,0	4,5	22,0	105	0,335	50
3210019000	19,0	4,5	28,0	150	0,450	50

Application: Thick walled, robust hose. Suitable for compressed air, water, lubricating oil, greases and oil-based solvents. This makes it ideal for use in workshops and garages.

Remark:

- Cutted length not possible

We recommend assembly with

5200
Air couplings



5201
Air couplings



6030
Pincher clamps

