
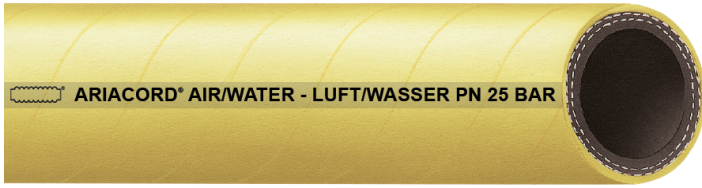


## ARIACORD®/YELLOW

Air pressure/waterhose



Marking:  Ariacord® Air/Water - Luft/Wasser PN 25 bar - BP 80 bar

Norm	EN ISO 1307:2008	Color tube	Black
Working pressure	25 bar	Compound cover	EPDM
Bursting pressure	80 bar	Cover	Fabric finish
Min. temperature	-30 °C	Color cover	Yellow
Max. temperature	+80 °C	Resistance cover	Ageing resistant, Weather resistant
Compound tube	EPDM	Reinforcements	Textile plies
Construction tube	Smooth		

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3225032000	32,0	7,0	46,0	260	1,200	40
3225038000	38,0	7,0	52,0	350	1,400	40
3225050000	51,0	7,5	66,0	400	1,900	20/40
3225063000	63,5	9,5	82,5	480	2,900	40
3225075000	76,0	9,5	95,0	610	3,300	40

**Application:** High quality, robust, thick walled flexible rubber hose for heavy duty applications in the industry, maintenance workshops, tunnel construction, infrastructure and on construction sites. Suitable for transport of water and air. The hose is also resistant to oil mist.

**Remark:**

- Cutted length possible

**We recommend assembly with**

5611  
Swiveling flange



5560  
Safety clamps

