


SALDAFORM®/BLACK

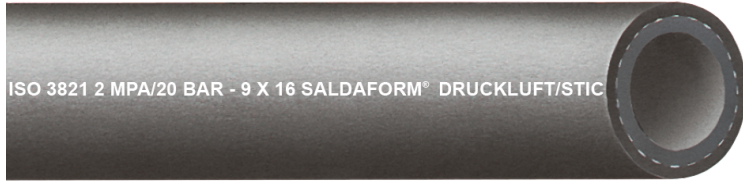

Argon hose
for welding purposes

Marking: ISO 3821 2 MPA/20 bar - ID mm Saldaform® Druckluft/Stickstoff/CO²/Argon
Compressed Air/Nitrogen/CO²/Argon - year

Norm	EN ISO 1307:2008, ISO 3821:2019	Construction tube	Smooth
Working pressure	20 bar	Color tube	Black
Bursting pressure	60 bar	Compound cover	EPDM
Min. temperature	-30 °C	Cover	Smooth
Max. temperature	+70 °C	Color cover	Black
Compound tube	EPDM	Reinforcements	Textile plies

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3262006000	6,3	3,5	13,3	40	0,160	40
3262009000	9,0	3,5	16,0	50	0,220	40

Application: Very flexible smooth hose for the transport of inert gases such as argon, nitrogen, carbon dioxide and compressed air.

Remark:

- Cutted length not possible

