
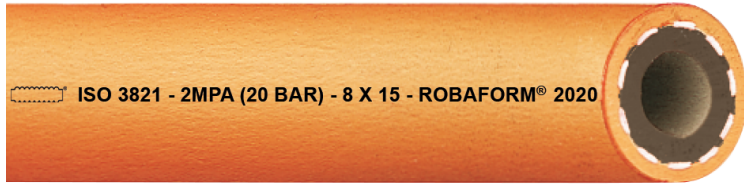


## ROBAFORM®

### Propane hose



Marking:  ISO 3821 - 2MPa (20 bar) - dimension - Robaform® - year

Norm	EN ISO 1307:2008, ISO 3821:2019	Color tube	Black
Working pressure	20 bar	Compound cover	EPDM
Bursting pressure	60 bar	Cover	Smooth
Min. temperature	-30 °C	Color cover	Orange
Max. temperature	+70 °C	Resistance cover	Ageing resistant, Weather resistant
Compound tube	NBR	Reinforcements	Textile plies
Construction tube	Smooth		

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Weight (kg/mtr)	Length (mtr)
3266008050	8,0	3,5	15,0	0,200	50

**Application:** Very flexible hose for the transport of propane, gaseous liquid petroleum gas (LPG), CNG and for mixtures of methyl acetylene. Hose is used for welding and cutting work. Very popular in the roofing industry due to the reinforced insert, which is distinctive of the robust / firm character of this hose. Frequently used as a propane gas burner hose.

**Remark:**

- Cutted length not possible

