


SUPER AIR

Thermoplastic air pressure hose

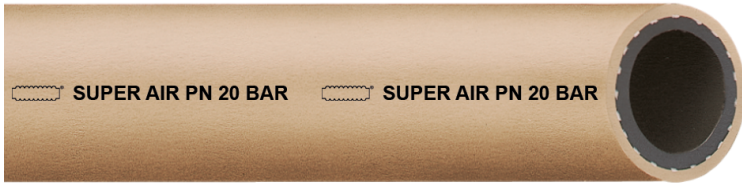

Marking:  Super Air PN 20 bar

Norm	EN ISO 1307:2008	Color tube	Black
Working pressure at 20°C	20,0 bar	Compound cover	PVC
Bursting pressure	60 bar	Cover	Smooth
Min. temperature	-20 °C	Color cover	Beige
Max. temperature	+60 °C	Resistance cover	Ageing resistant, Ozone resistant, UV resistant, Weather resistant
Compound tube	PVC	Reinforcements	Polyester plies
Construction tube	Smooth		

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
4210006000	6,0	2,5	11,0	50	0,090	50
4210008000	8,0	2,5	13,0	60	0,115	50
4210010000	10,0	2,75	15,5	75	0,150	50
4210013000	13,0	3,0	19,0	100	0,200	50
4210016000	16,0	3,5	23,0	120	0,295	50
4210019000	19,0	3,75	26,5	140	0,365	50
4210025000	25,0	4,25	33,5	180	0,530	50

Application: Flexible lightweight PVC hose, weather and aging resistant. Suitable for various water and compressed air applications in industry, construction and agriculture. Can also be used for the transport of pesticides in agricultural applications.

Remark:

- Cutted length not possible

We recommend assembly with

5200
Air couplings



5201
Air couplings



6030
Pincher clamps



