
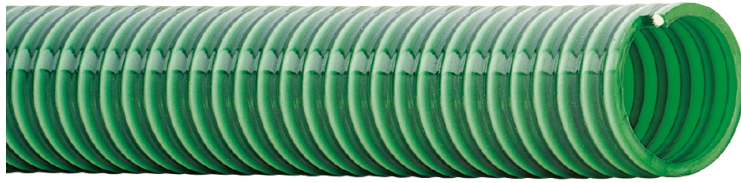


COSMO®/ELASTICO



Thermoplastic suction hose
extreme flexible multi purpose hose.

Marking:  Cosmo® Elastico - Dimension

Norm	EN ISO 1307:2008	Color tube	Dark green transparent
Vacuum	0,60 bar	Compound cover	PVC
Min. temperature	-15 °C	Cover	Slightly corrugated
Max. temperature	+60 °C	Color cover	Dark green transparent
Compound tube	PVC	Reinforcements	Rigid PVC spiral
Construction tube	Smooth	Color spiral	White

Art.-no.	Ø Inner (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
4405040000	40,0	47,0	160	0,560	50
4405050000	51,0	59,0	204	0,850	50

Application: Flexible, translucent, lightweight hose for suction of water under light working conditions for both industrial and agricultural applications. The Cosmo/Elastico can also be used as a pond hose in combination with light vacuum pumps. In addition, the hose is also frequently used on construction sites for water treatment. This hose is also very suitable for the passage of slurry on slurry injectors, trailing shoe system and it can serve as a seed feed hose through the smooth inner wall.

Remark:

- Cutted length possible

We recommend assembly with

5510
Kamlök couplings



5124
Storz couplings



6202
Mikalor Supra - clamps

