


CORRUFLEX/AS

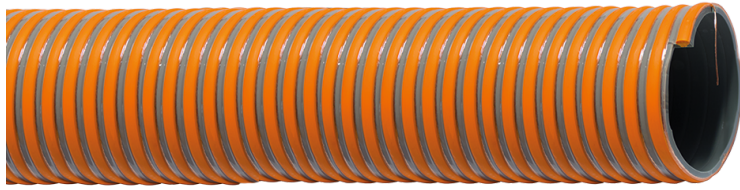

Very flexible suction and discharge hose

Marking:  Corruflex / AS - M - ID - Static-Wire

Norm	EN ISO 1307:2008	Construction tube	Smooth
Working pressure at 20°C	2,0 bar	Color tube	Grey
Vacuum	0,90 bar	Compound cover	PVC
Min. temperature	-15 °C	Cover	Slightly corrugated
Max. temperature	+60 °C	Reinforcements	Rigid PVC spiral, Static wire
Compound tube	PVC	Color spiral	Orange

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
4456050000	51,0	4,5	60,0	160	0,960	50
4456075000	76,0	5,5	87,0	230	1,600	50
4456100000	102,0	7,0	116,0	310	2,700	50
4456125000	127,0	7,5	142,0	390	3,450	30
4456150000	152,0	8,0	168,0	460	4,700	20

Application: For the transit of (industrial) water and dung and for irrigation systems under medium working conditions. Signal color ensures good visibility, which benefits the safety of users and their environment. The flexibility and durability in combination with the fairly smooth exterior of the hose ensures that it is frequently used in industrial cleaning where very high demands are required on these type of products.

Remark:

- Cutted length possible
- We recommend using cord for hose assembly
- Regarding the overpressure we would like to refer to the guidelines for the right use of the hoses which are mentioned on our website

We recommend assembly with

5721
Perrot couplings



5710
Bauer couplings



6202
Mikalor Supra - clamps

