
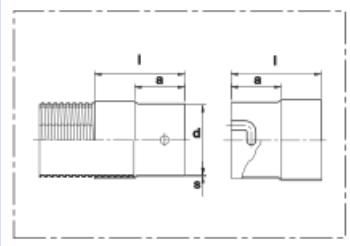


CONNECT 202

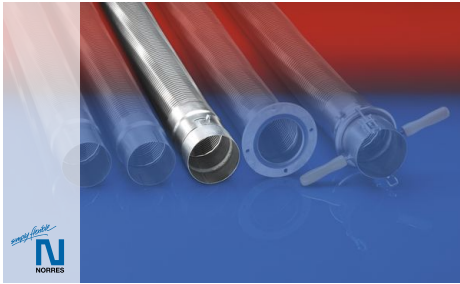

Connectors for connecting or attaching metal hoses

Properties

- conforms to RoHS guideline
- **Bayonet lock 202**: cylindrical bayonet lock, alternatively coupling with a pin or flange with an L-slot, extension at one end for attaching the metal hose

- REACH according to --> Technology / Technical Information / REACH

Design

- Stainless Steel (INOX)

Delivery variants

- further diameters available on request

S	A	L	Weight	Suitable for Hose I.D.	Order No.
(mm)	(mm)	(mm)	(kg/pcs)	(mm)	

Assembly

202-0000-2905

Bayonet Fitting 202 with L-Slot Stainless Steel (INOX)

1,00	50	80	0,110	50	202-0050-2014
1,00	50	90	0,160	60	202-0060-2014
1,00	50	90	0,180	70	202-0070-2014
1,00	50	90	0,200	80	202-0080-2014
1,00	60	110	0,300	100	202-0100-2014
1,00	60	110	0,350	120	202-0120-2014
1,00	60	110	0,370	125	202-0125-2014
1,50	70	130	0,730	140	202-0140-2014
1,50	70	130	0,770	150	202-0150-2014
1,50	70	130	0,910	180	202-0180-2014
1,50	90	160	1,330	200	202-0200-2014
2,00	90	160	2,160	250	202-0250-2014
2,00	100	180	2,870	300	202-0300-2014

Bayonet Fitting 202 with Pin Stainless Steel (INOX)

1,00	50	80	0,110	50	202-0050-2013
1,00	50	90	0,160	60	202-0060-2013
1,00	50	90	0,180	70	202-0070-2013
1,00	50	90	0,200	80	202-0080-2013
1,00	60	110	0,300	100	202-0100-2013
1,00	60	110	0,350	120	202-0120-2013
1,00	60	110	0,370	125	202-0125-2013
1,50	70	130	0,730	140	202-0140-2013
1,50	70	130	0,770	150	202-0150-2013
1,50	70	130	0,910	180	202-0180-2013
1,50	90	160	1,330	200	202-0200-2013
2,00	90	160	2,160	250	202-0250-2013
2,00	100	180	2,870	300	202-0300-2013

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at

www.norres.com/en/technology/

www.norres.com

CONNECT 202

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at www.norres.com/en/technology/

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at www.norres.com/en/technology/