



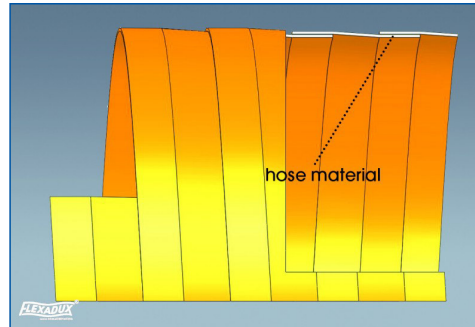

## FLEXADUX® P 7 L PU AE Flat

**Polyurethane hose, flat, without wire reinforcement, food proved**

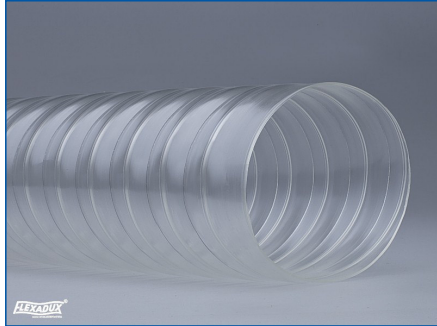

### Material:

Polyether- polyurethane, clear

### Single Length:

5 and 10 m.

### Temperature Resistance:

-40° C up to +100° C

### Applications:

Transport of abrasive solids on sieving machines e. g.

### Properties:

Resistant to hydrolysis and microbes, non toxic, food proved according to FDA and EU regulations, smooth bore, good flexibility, excellent abrasion resistance, vibration proof, resistant to oil and petrols, free of halogen and softeners.

### Special Construction:

- P7 L PU AS Flat: antistatic ( $R \leq 10^8$  Ohm), conform to TRBS 2153

- P7 N PU AE Flat: reinforced version (material thickness: 1,40 mm)

## TECHNICAL DATA

dia./ (mm)	Wall Thickness (mm)	Weight (kg/m)
50	0,70	0,23
80	0,70	0,36
100	0,70	0,39
120	0,70	0,43
125	0,70	0,45
140	0,70	0,50
150	0,70	0,54
160	0,70	0,57
175	0,70	0,62
180	0,70	0,64
200	0,70	0,71
225	0,70	0,80
250	0,70	0,89
275	0,70	0,98
300	0,70	1,07
350	0,70	1,24
400	0,70	1,42
450	0,70	1,59

Further diameters available upon request!

Technical data are based on + 25° C.



**SCHAUENBURG RUHRKUNSTSTOFF GMBH**

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com