


## ARMOFLEX®

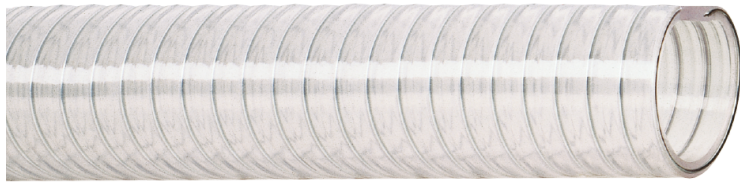

**Alimentary suction and discharge hose**  
for heavy duty circumstances.

Marking: ArmoFlex® - Diameter - Reg. EU 10/2011

Norm	EN ISO 1307:2008, EU 10/2011 Cat. A, EU 10/2011 Cat. B, EU 10/2011 Cat. C, EU 1935/2004, LFGB	Color tube	Transparent
Vacuum	0,90 bar	Compound cover	Soft PVC
Min. temperature	-15 °C	Cover	Smooth
Max. temperature	+60 °C	Color cover	Transparent
Compound tube	Soft PVC	Reinforcements	Steel spiral
Construction tube	Smooth		

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	WP at 20°C (bar)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
4480010000	10,0	3,0	16,0	10,0	30	0,200	30
4480012000	12,0	3,0	18,0	9,0	36	0,210	30
4480014000	14,0	3,0	20,0	9,0	42	0,230	50
4480016000	16,0	3,0	22,0	9,0	48	0,260	50
4480018000	18,0	3,0	24,0	8,0	54	0,320	50
4480020000	20,0	3,5	27,0	8,0	60	0,360	50
4480025000	25,0	4,0	33,0	8,0	75	0,500	50
4480032000	32,0	4,0	40,0	8,0	96	0,680	50
4480038000	38,0	4,5	47,0	7,0	114	0,820	50
4480040000	40,0	4,5	49,0	7,0	120	0,900	50
4480045000	45,0	4,5	54,0	6,0	135	1,100	50
4480050000	51,0	5,0	61,0	5,0	153	1,280	50
4480060000	60,0	5,5	71,0	5,0	180	1,750	30
4480063000	63,0	6,0	75,0	5,0	189	1,800	30
4480075000	76,0	6,0	88,0	4,0	228	2,400	30
4480080000	80,0	6,5	93,0	4,0	240	2,570	30
4480090000	90,0	6,5	103,0	4,0	270	2,950	20
4480100000	102,0	7,0	116,0	3,0	306	3,800	20
4480110000	110,0	7,5	125,0	3,0	330	4,200	20
4480125000	127,0	8,0	143,0	3,0	381	4,800	20
4480150000	152,0	8,5	169,0	2,0	456	6,500	20

**Application:** Very flexible and robust PVC hose. Suitable for transit of for example (industry) water, mud, slurry and various other liquids. Extremely suitable for the transport of liquid food, as the hose is fully certified for the various food categories according to the European regulation EU 10/2011. The ArmoFlex hose is also frequently installed on slurry injectors in the agricultural sector.

**Remark:**

- Cutted length possible
- Regarding the overpressure we would like to refer to the guidelines for the right use of the hoses which are mentioned on our website

**We recommend assembly with**

5721  
Perrot couplings



5124  
Storz couplings



6202  
Mikalor Supra - clamps

